


## EXCAVATOR BLADE MOWERS PRODUCT INFORMATION

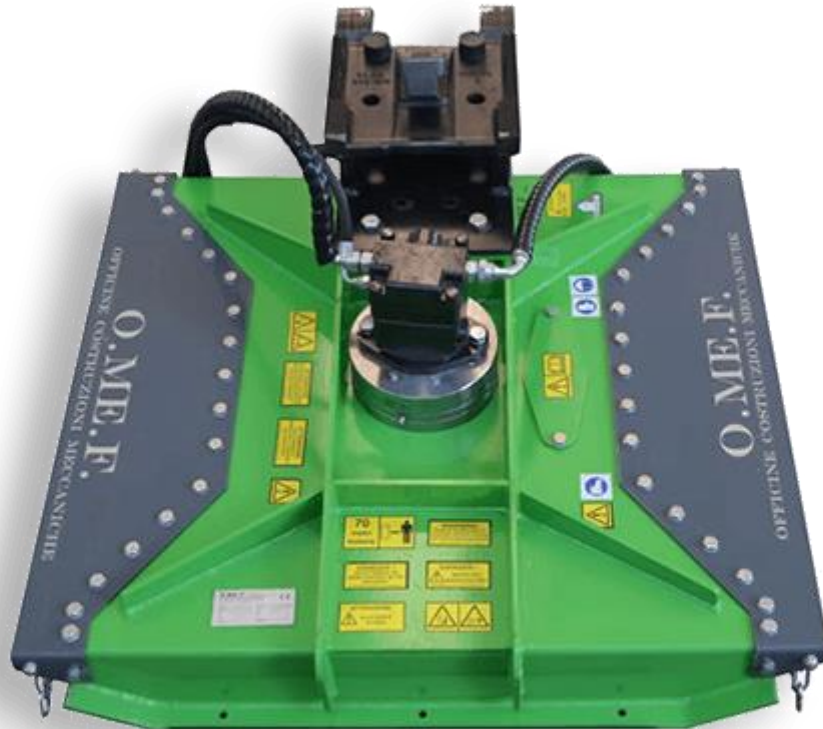


### STANDARD DUTY TRL68 BLADE MOWER

SPECIFICATIONS	
EXCAVATOR WEIGHT RANGE: 9900 - 13250 lbs.	
ATTACHMENT WEIGHT	331 lbs.
FLOW RANGE	16 - 21 gpm
MOTOR	high performance piston engine
VALVE	pressure relief valve
MAX PRESSURE	3626 psi
GEARBOX SPEED	3500 - 4000 rpm
WORKING DIAMETER	23.6"
MATERIAL CUTTING DIAMETER	up to 4" material
HEIGHT	10.8"
WIDTH	38.6"
LENGTH	36.2"

Available through Solaris Attachments  
[www.solarisattachments.com](http://www.solarisattachments.com) | (888) 754-3609

**EXCAVATOR BLADE MOWERS**  
**PRODUCT INFORMATION**

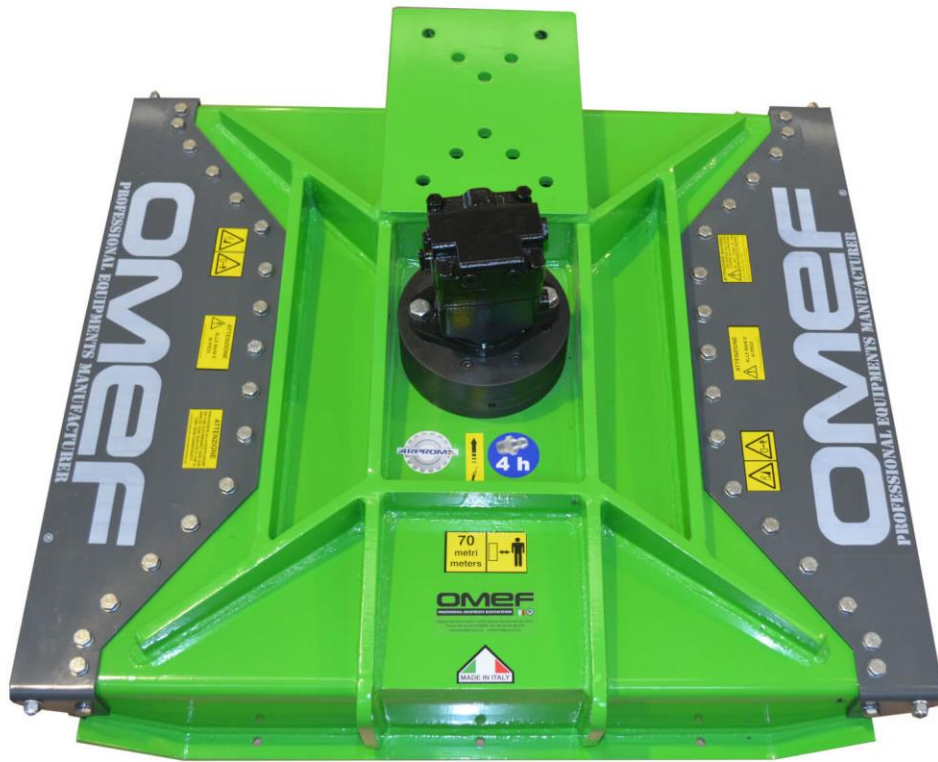

**HEAVY-DUTY TRL68H BLADE MOWER**

SPECIFICATIONS	
EXCAVATOR WEIGHT RANGE: 13250 - 17650 lbs.	
ATTACHMENT WEIGHT	595 lbs.
FLOW RANGE	16 - 21 gpm
MOTOR	high performance piston engine
VALVE	pressure relief valve
MAX PRESSURE	4351 psi
GEARBOX SPEED	3500 - 4000 rpm
WORKING DIAMETER	23.6"
MATERIAL CUTTING DIAMETER	up to 5" material
HEIGHT	10.8"
WIDTH	38.6"
LENGTH	36.2"

Available through Solaris Attachments  
[www.solarisattachments.com](http://www.solarisattachments.com) | (888) 754-3609