

Customer Name: _____

and Phone: _____

Machine Year/Make/Model: _____


NOTE: All measurements are taken as if sitting in the cab looking at the bucket.
B+C+E must equal D. Do not include excess pin sticking out on any measurements. Only measure the bucket/coupler bushings.

If a cross bolt is used to retain the main pin, please note the diameter of the bolt and the distance from the outside edge of bushing.

Bolt Diameter _____

Bolt Hole distance from outside of C or E bushing (choose one)

C ☐ E ☐

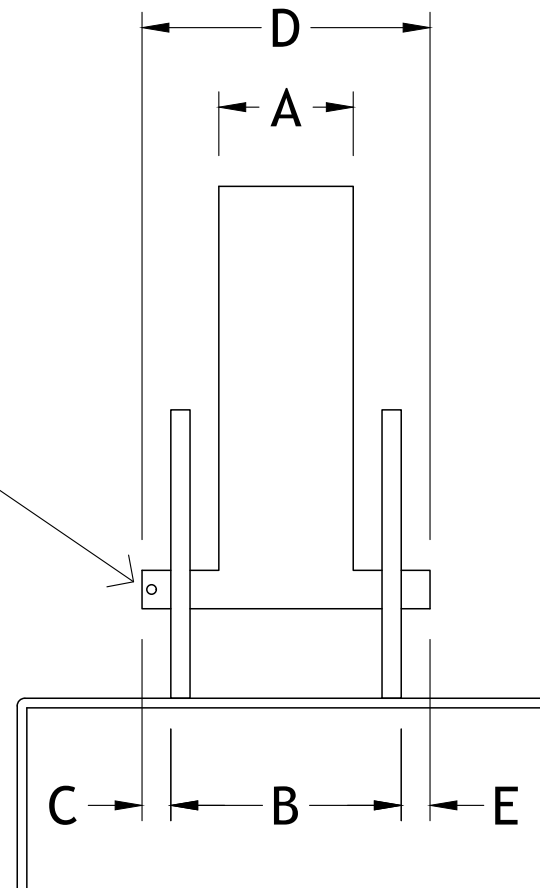

A _____

B _____

C _____


D _____

E _____


Main Pin ØDiamter

Main Pin
ØDiameter

F

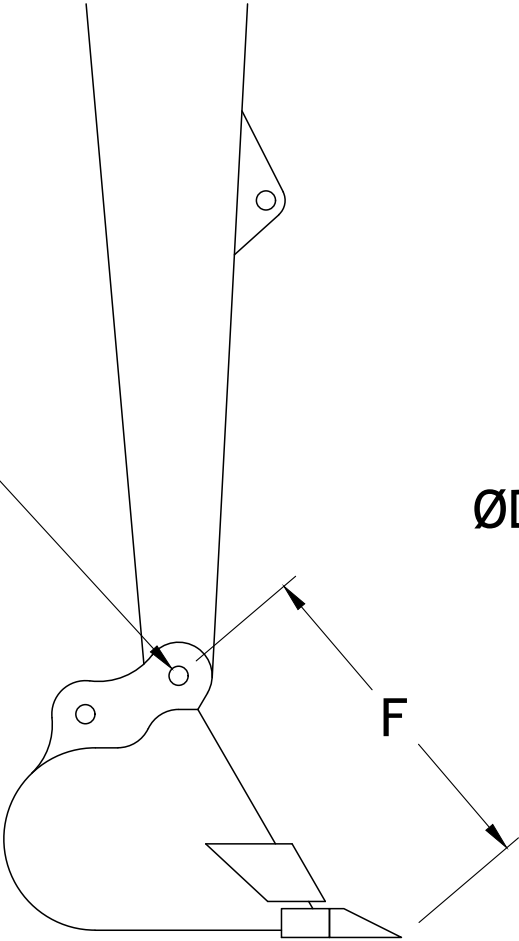

If a cross bolt is used to retain the cylinder mount pin, please note the diameter of the bolt and the distance from the outside edge of bushing.

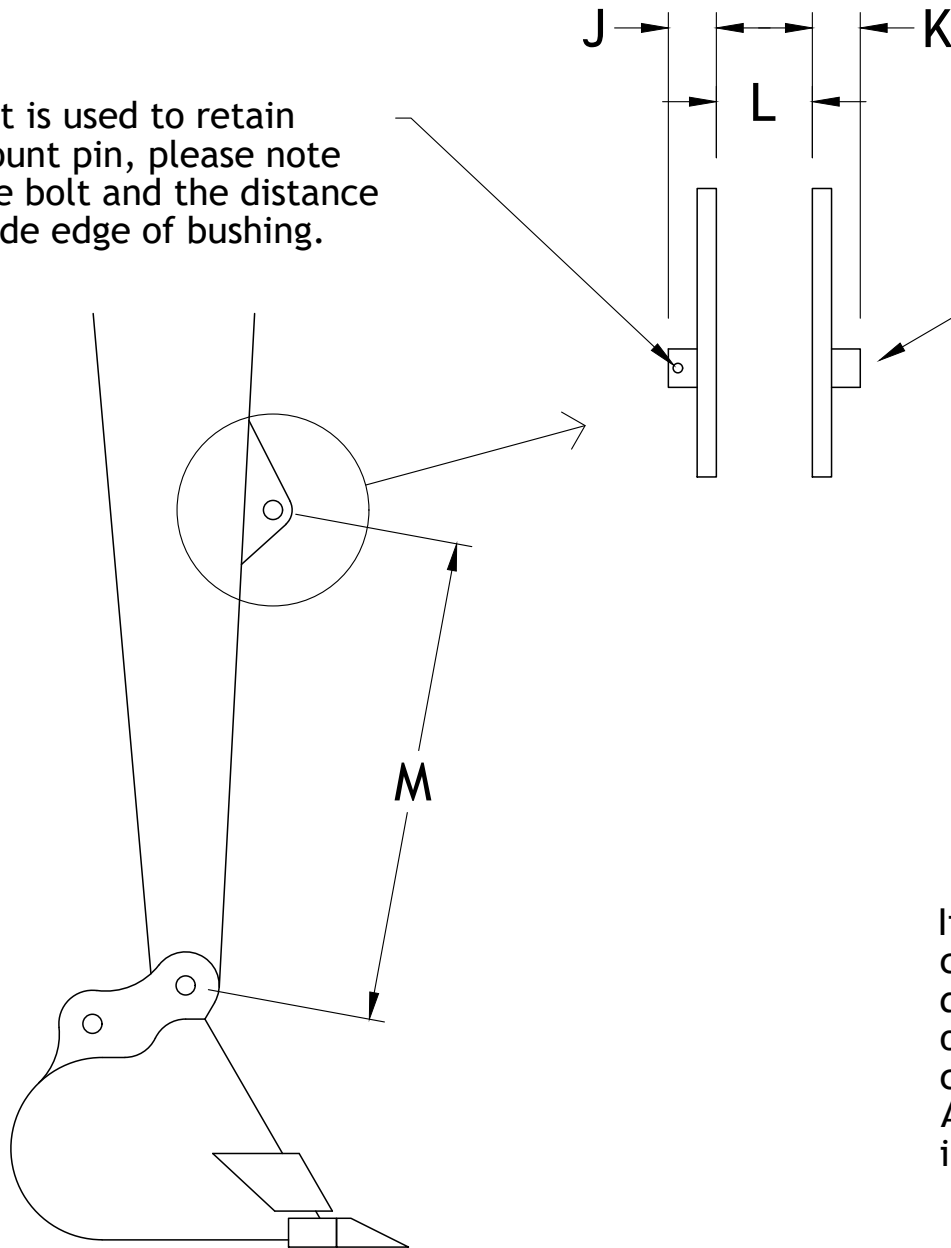

Cylinder Mount
Pin Hole Diameter _____

J _____

K _____

L _____

M _____

If you have an existing cylinder mount note the distance from the center of the main pin to the center of the mount hole. Also, fill out the above information.